


How to use demodulation function

AM demodulation


1. Set central frequency to carrier frequency of modulated signal.
 2. Then press **【Demod】** → **Demod off** → **AM** → **【SPAN】** → **Zero Span**
- Then waveform (logarithmic type) of demodulated AM signal will be shown like below shown

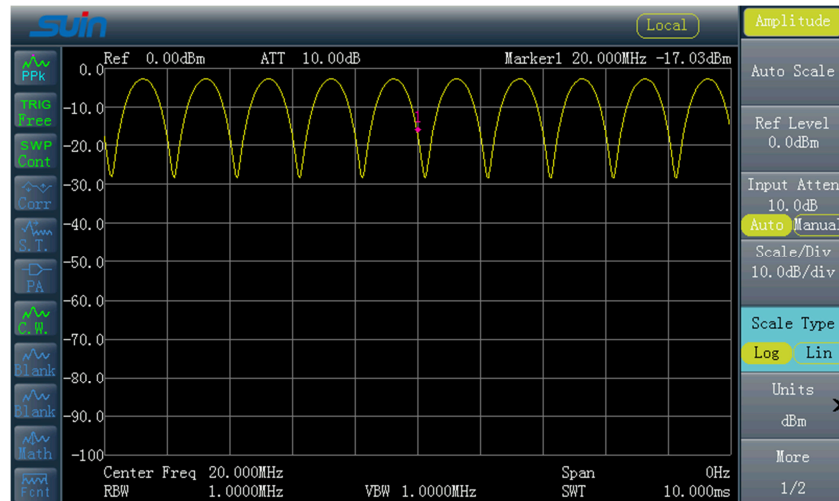

Continue to set AM parameter such as speaker on/off, volume, DemodTime through operation sequence:

【Demod】 → **Demod off** → **AM** → **DemodSetup**

Change scale type to Line type through **【AMPT】** → **Scale Type** as below picture shown:

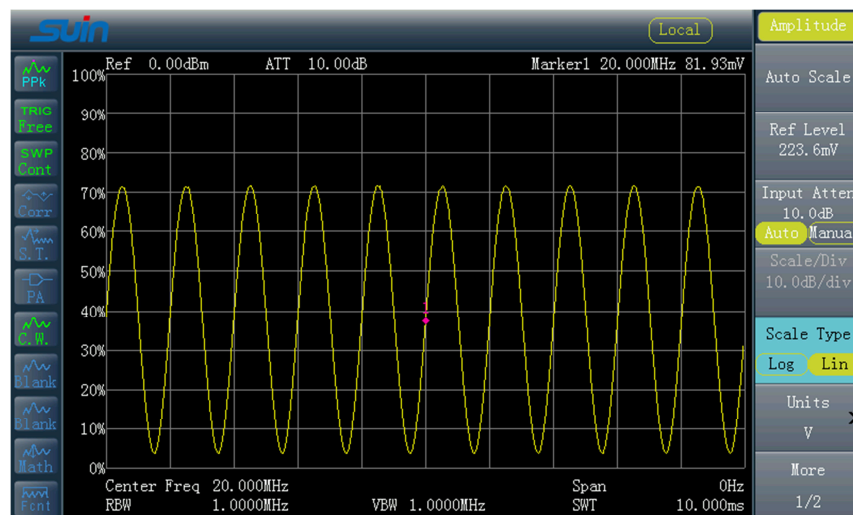

The setting of FM demodulation is similar as AM, no explain anymore. But the effect is not so good as AM currently, we will improve it in coming job.